

BROOKS B15 SADDLE & SLENDER GRIP FITTING

IMPORTANT INFORMATION

- If you are unsure of the correct fitting process please consult your Brompton dealer. We cannot accept responsibility for any failures due to incorrect fitting or maintenance

FITTING THE SADDLE

The Pentacclip allows two saddle heights (fig. 1). In the upper position you gain about 20mm but this will make the folded bike larger. The clamp band can also be rotated to give a forward or rearward position. The lower and forward position with the saddle pushed forward on its rails gives the smallest folded package. Slide the Pentacclip onto the seatpost, positioning it about halfway up the small diameter section of the seatpost (fig.2) to ensure enough clearance from the saddle to the seatpost. Once positioned tighten to 15Nm.

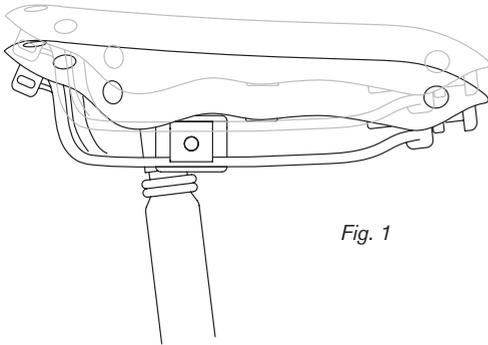


Fig. 1

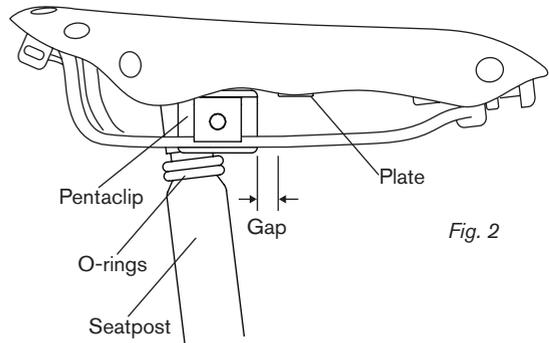


Fig. 2

If the saddle is mounted too far back, the pentacclip can contact the joining plate (fig. 2) on the underside of the saddle.

Ensure the Pentacclip or seatpost do not contact the underside of the saddle, or joining plate.

To change the position of the pentacclip Unscrew the bolt from the threaded part LPT, ensuring you are holding the two parts RP together and slide bolt, washer and part LPU out together (fig. 3). move the saddle to the opposite end and refit the bolt, washer and LPU and tighten to 15Nm.


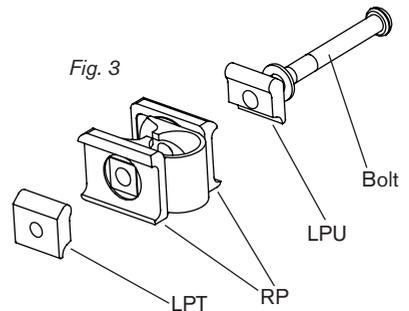


Fig. 3

Tighten the clamp bolts with a T10 Torx driver to 0.75Nm. This is a very low torque, take care not to overtighten

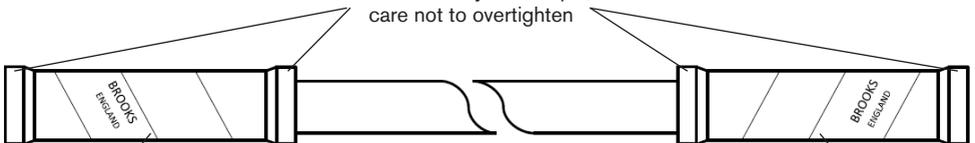

LEFT hand grip (when viewed from riding position)
Note the direction of tape twist and logo position

RIGHT hand grip (when viewed from riding position)
Note the direction of tape twist and logo position